


Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 5 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot:100V DC/10ms

- Support DisplayPort 1.2 input and HDMI1.4 output.
- Support HDMI highest video resolution 4K*2K@30Hz.

L	P/N
915±30MM	HDMIDP-03F-MM
1830±30MM	HDMIDP-06F-MM
3050±40MM	HDMIDP-10F-MM
4575±50MM	HDMIDP-15F-MM

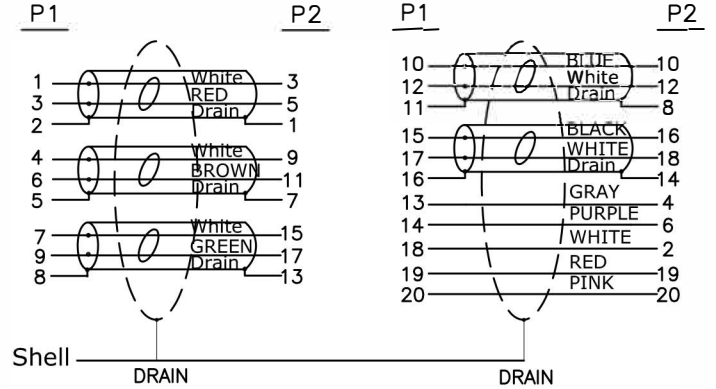

NO	DESCRIPTION	Q'TY	UNIT
12	DisplayPort M ABS Under the Shell Color: Black	1	pcs
11	DisplayPort M ABS on the Shell Color: Black	1	pcs
10	DisplayPort Port M 28AWG cable clip	1	pcs
9	DisplayPort Port M Insulation Black Shell Gold Plated	1	pcs
8	DisplayPort M Transparent dust cover	1	pcs
7	HDMI M Transparent dust cover	1	pcs
6	H. S. T: φ 1.5*16mm Color: Black	0.032	m
5	MINI DP TO PCB 28AWG cable clip	1	pcs
4	Transparent PE	4	g
3	45P PVC Color:Black	10	g
2	MDPH12M-15FT With PCBA	1	pcs
1	DP~UL20276~(7/0.127TA*1PR+EAM)*5+7/0.127TA*5C+AEB 85% 00:7.3MM Color: Black Marking:DisplayPort Cable...	L	m
NO	DESCRIPTION	Q'TY	UNIT

TOLERANCE		UNC	
INCHES	M/M	TITLE: DP TO HDMI M/M 28AWG	
.X	.015 .30	CUSTOMER :	
.XX	.010 .10	CUSTOMER P/N : HDMIDP-XXF-MM	
.XXX	.005 .05	SCALE	NONE
DRAWN BY	Hong	UNIT	MM
CHECK BY		DATE	2019.04.10
APPD BY		DRAWING NO.:	REV. A1
			1/1