


**Electrical Test:**

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm Max
3. Insulation Resistance: 10M ohm Min
4. Hi-Pot: 100V DC/10ms

**Pin Assignment**

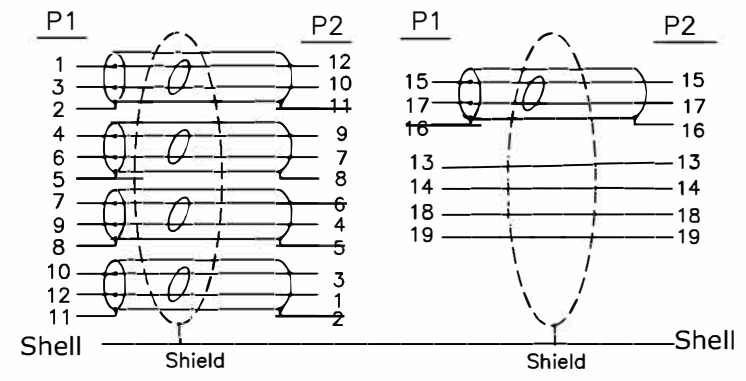

7	Inside Molding: LDPE	5	g		TOLERANCE				
6	Outside Molding: 45P PVC	12	g		INCHES	M/M			
5	copper foil:25u W=8MM	0.09	M		.X	.015 .30			
4	DisplayPort Port M ABS Shell Color: Black	2	pcs		.XX	.010 .10			
3	DisplayPort Port M The tin	2	pcs	.XXX	.005 .05	TITLE: Display Port 1.4 M TO M			
2	DisplayPort Port M Insulation Black Shell Gold Plated	2	pcs	DRAWN BY	Hong		CUSTOMER :		
1	DP1.4~[30AWG(7/0.10TC)+EAM]*5P+30AWG(7/0.10TC)*4C+AEB(16/10/0.12 85%AL)OD:6.0MM~Color: Black Marking:DisplayPort Cable E342987 元 AWM STYLE 20276 80°C 30V VW-1	1.85	M	CHECK BY			CUSTOMER P/N: DP-XXF-MM-V1.4		
NO.	DESCRIPTION	Q'TY	UNIT	APPD BY			SCALE NONE	DRAWING NO:	REV A0
							UNIT MM		
							DATE 2020.07.09		1/1