



TEST:
 CONDUCTOR RESISTANCE:5 OHMS MAX.
 INSULATOR RESISTANCE:10M OHMS MIN.
 HI-POT:DC 300V 0.01SEC.

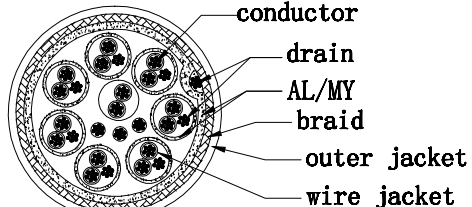

PIN OUT				
P1		P2	P1	P2
1	orange	1	14	red
2	white	2	15	black
3	drain	3	16	brown
4	brown	4	17	yellow
5	white	5	18	white
6	yellow	6	19	drain
7	white	7	20	green
9	black	9	21	white
10	white	10	22	drain
11	drain	11	23	red
12	yellow	12	24	white
13	white	13	G	braid

packing:



- CABLE:24+1, OD: 9.0, black PVC jacket (ROHS).
- CONN:DVI24+1/M gold-PIN black housing solder (ROHS).
- PE: low density internal model material (ROHS).
- PVC: 50P black PVC (ROHS).
- screw: 2.8*45mm nickel-plated (ROHS).
- ferrite: OD:9.5*17.5*28.5mm (ROHS).
- (1P*28AWG+D+AL+MY)*7C+1P*28AWG+3C*28AWG+AL+D+B OD9.0

Appvy by:		Check by:		Drawn by:				
Description		Anebd date		Description:				Unit:
				DVI 24+1/M-DVI 24+1/M				
				Item: DVID-MM-XXF				MM

