
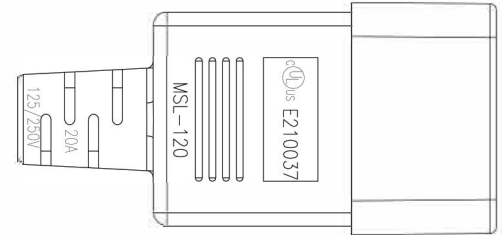
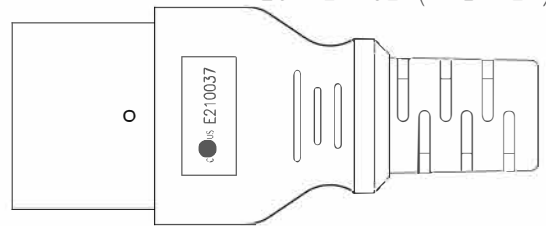

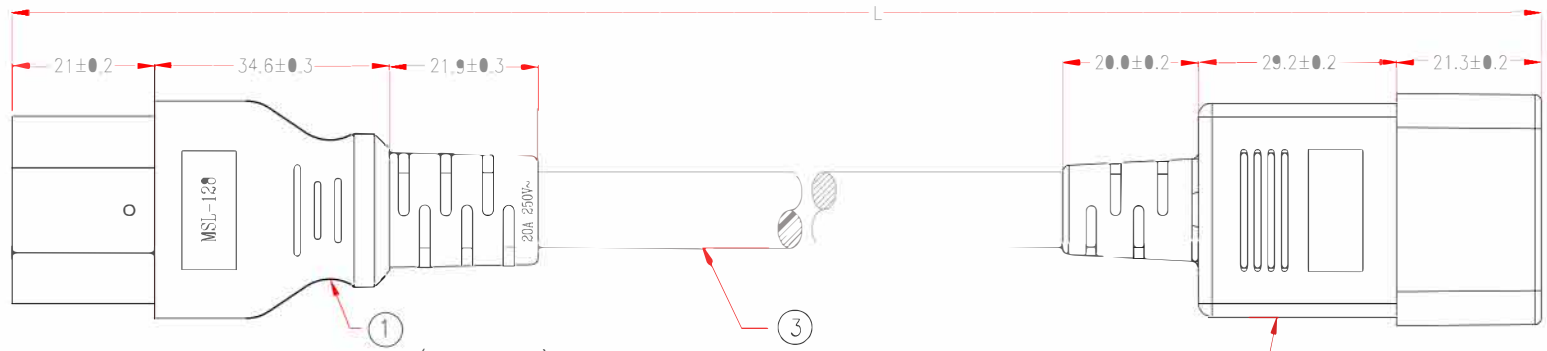


P1: M-049A

P2: M-043A




Customer No.: No.:1



PACKING A: <1FT

PACKING A: <2FT

PACKING C: >2FT



MARKING: (UL) SJT 3/C 12AWG(3.31MM²) VW-1 105°C 300V E204978
 CSA SJT 3/C 3.31MM²(12AWG) FT2 105°C 300V 204790 MSL

120128B2F12A(FP258-00)	
P1	P2
BLACK L	L
WHITE N	N
GREEN E	E

P1,P2: cULus E210037

NOTE: All relevant materials are complied with RoHS directive . THE CABLE MARKING IS CONCAVE LETTERING MOULD

3	UL SJT 12AWG x 3C, OD 11.0mm, JACKET BLACK, DRAWING No. EPSJT011203C-158	H5TC41-0304K09	L-30mm	M304	
2	MOLDED PVC 35P, BLACK	H1BC02-0304K09		M304	
	BRACKET: YST-038	A1QC37-0767K09	1	M767	
	TERMINAL: 97607BS-1	A1QB35-0257	1	M257	
	TERMINAL: 97606BS-1	A1QB34-0257	2	M257	
1	MOLDED PVC 35P, BLACK	H1BC02-0304K09	1	M304	
	BRACKET: Y-037(MSL-128)	A1QC38-0767K09	1	M767	
	TERMINAL: 98739ABS-0	A1QB33-0257	3	M257	
No.	DESCRIPTION			Q'TY	Supplier

APPROVED					Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU	23/MAY/18	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	XIAO	23/MAY/18	PRODUCT NO.	PWCD-C20C21-20A-XXF-BLK	

REV.1 2018.05.23 MODIFY TOLERANCE SYMBOL

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm