
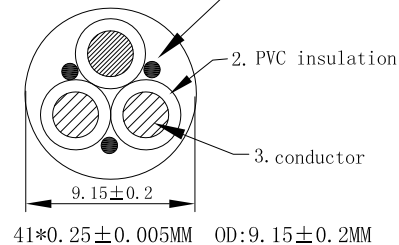
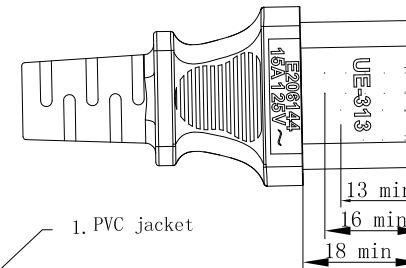
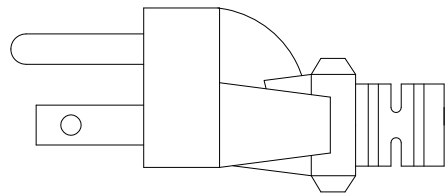


Items	Content Revised	Date
1		

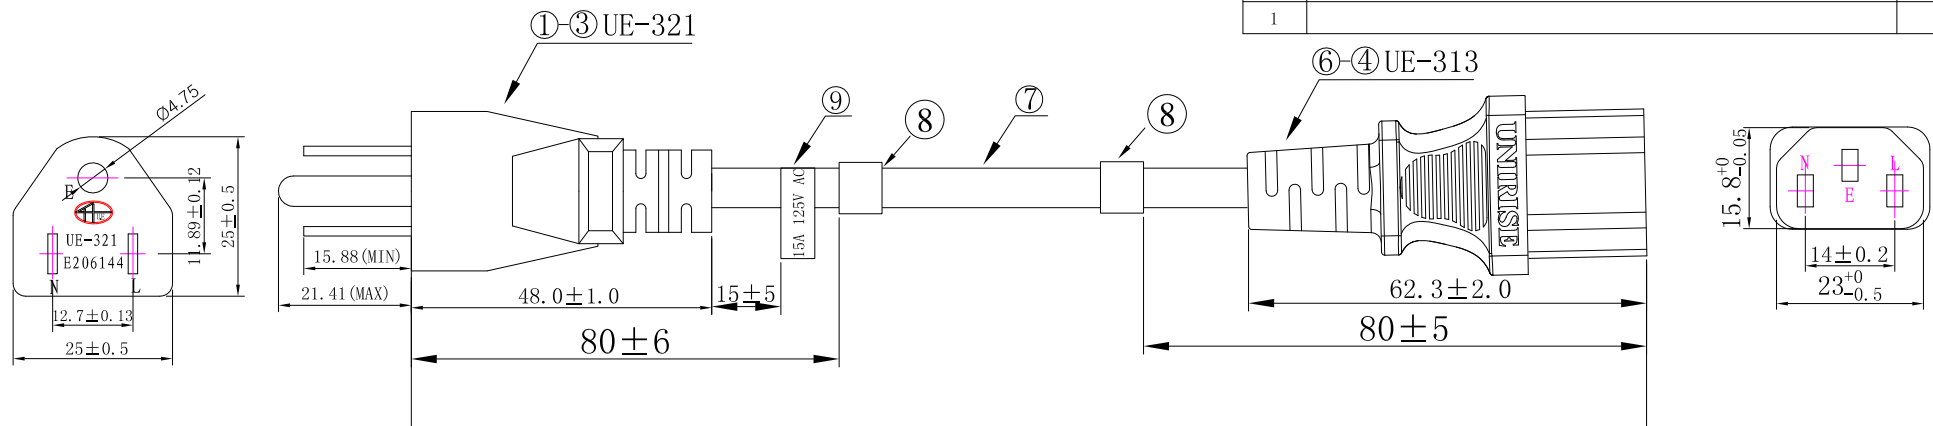




Technical requirements:

1. Plug: a:UE-321, Current (A) :15, Voltage (V) :125  
b:UE-313, Current (A) :15, Voltage (V) :125
2. Cord: Soft SJT #14/3C 105°C unirise
3. High Voltage Tested: 1500V/S No Attacked, No Flicker
4. No nick, Spot, Mottle Nn Appearance and Wording is Clearly
5. The All Material Compliance with RoHS and REACH

BOM表

9	39002005	UL Label 15A 125V AC	1PCS	----
8	39005021	47x13mm PET Paster Length label	2PCS	----
7	205353021043	SJT 14/3C 105°C Soft	1PCS	
6	306560619	PVC of plug 77A	/	
5	316313900	Inside Shelf (S8741PL-39)	1PCS	White
4	315313902	Blade of UE-313 (98740BS-0)	3PCS	----
3	306310619	PVC of plug 77A	/	
	315321900	Blade of UE-321	1PCS	----
2	315222900	NO Polarity Blade	2PCS	----
1	316321900	Inner frame	1PCS	White
Items	Part Number	Description	Q' TY	Colour

CORD MARKING: E176096 (UL) SJT VW-1 105°C 300V 3x2.08mm<sup>2</sup> (14AWG)  
Or C(UL) SJT FT1 105°C 300V 3x2.08mm<sup>2</sup> (14AWG) UNIRISE

CUSTOMER CONFIRM	PWCD-515PC13-15A-XXF-YYY	XXF = LENGTH YYY = COLOR
<b>Drawing No.:</b> PWCD-515PC13-15A-XXF-		Page:    Version:A
Power Supply Cord: UE-321+UE-313		Approved by:jason
<b>Customer :</b>		Checked by:king
<b>Colour :</b>		Drawn by:songyu
Sample Part NO.: W009-007-2013	Unit: mm	Sheet: 
		DATE: 2013-07-09