


P1: M-003

P2: M-028A

Customer No.: No.: 2

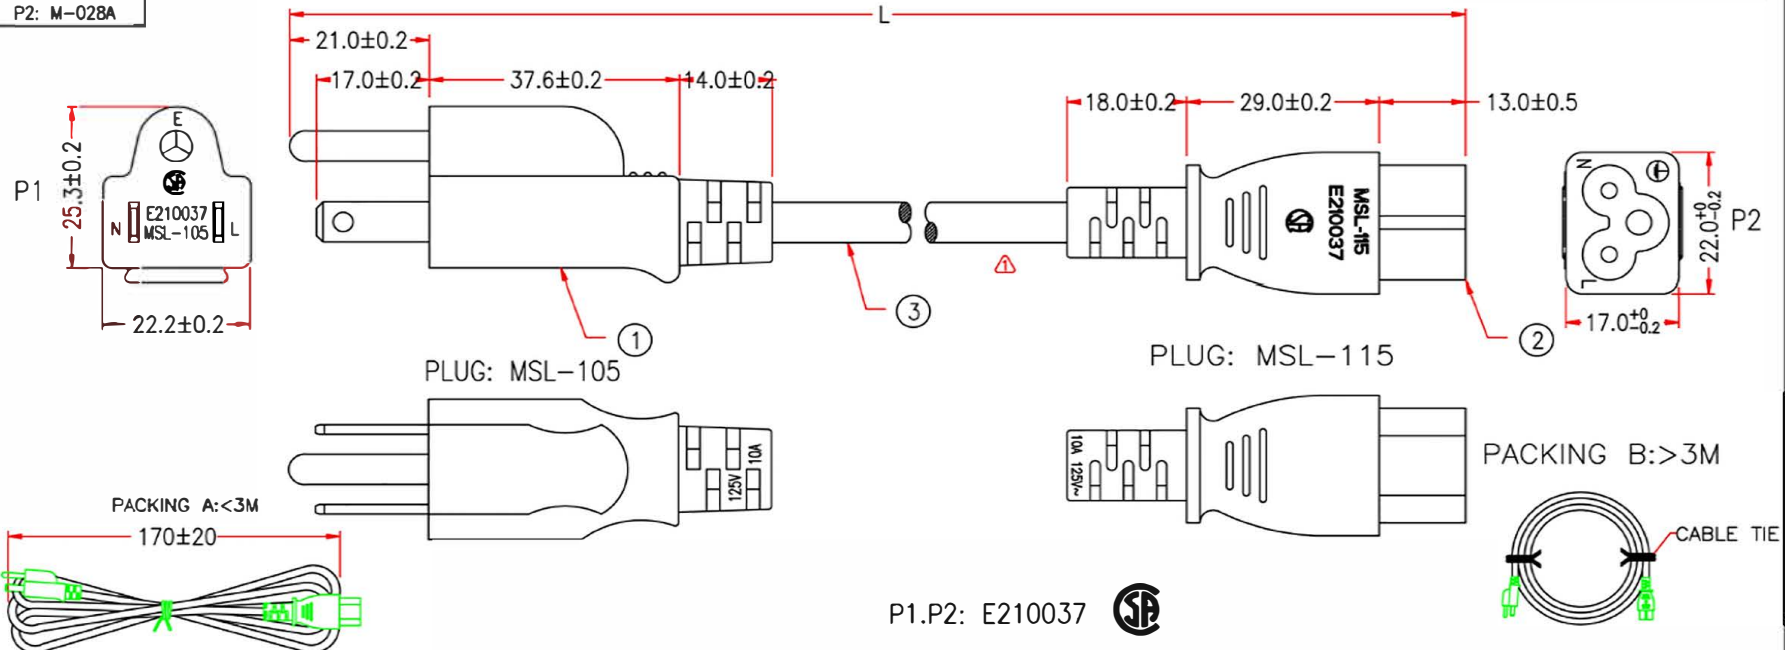

P1.P2: E210037

NOTE: All relevant materials are complied with RoHS directive .

MARKING:

(UL) SVT 3/C 18AWG(0.824MM²) VW-1 75°C 300V E204978
CSA SVT 3/C 0.824MM²(18AWG) FT2 60°C 300V 204790 MSL

	P1		P2
BLACK	L	_____	L
WHITE	N	_____	N
GREEN	E	_____	E

3	UL SVT 18AWG x 3C, OD 6.3mm, JACKET BLACK, DRAWING No.EPSVT011803C-008	L-20mm	M304
2	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-008	1	M767
	TERMINAL: 98732PS-0	1	M257
	TERMINAL: 98714PS-0	2	M257
1	MOLDED PVC BLACK, 35P		M304
	BRACKET: YS-002	1	M767
	TERMINAL: 98661BS-1	2	M257
	TERMINAL: ø4.75mm 321203	1	M769
No.	DESCRIPTION	Q'TY	Supplier

Part # PWCD-515PC5-10A-XXF-BLK

RE.1 2009.10.29 TAKE OFF LABEL

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

APPROVED

CHECKED DHU 29/OCT/09

DRAWING LI 29/OCT/09

UNIT: mm