


Label for 1FT

Label for 3FT

Label for 6FT and above

Labels include text such as "DANGER: ELECTRICAL CORDS CAN BE HAZARDOUS" and "BEFORE USE", "DURING USE", and "AFTER USE". Symbols include a lightning bolt, a hand being struck, and a crossed-out recycling symbol.

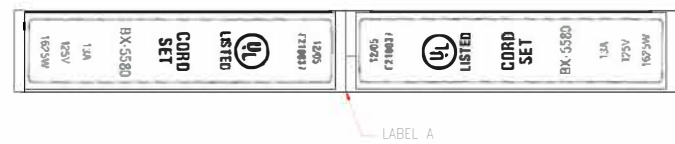

*NOTE: ALL relevant materials are complied with RoHS directive.
 THE MARKING IS CONCAVE LETTERING MOULD
 LABEL B IS "WARNING LABEL"
 LABEL A IS "UL LABEL"

MARKING: (UL) SJT 3/C 16AWG(1.31MM²) VW-1 75°C 300V E204978
 CSA SJT 3/C 1.31MM²(16AWG) FT2 60°C 300V 204790 MSL

P1	P2
L	L BLACK
N	N WHITE
E	E GREEN

No.	DESCRIPTION	Q'TY	Supplier
3	UL SJT 16AWG*3C OD 8.5mm, JACKET BLACK, DRAWING No.EPSVT011603C-058	H5TC43-0304K09	M304
2	MOLDED PVC 45P, COLOR BLACK	H1BF01-0304K09	M304
	BRACKET: YS-016	A1QC15-0767	1 M767
1	TERMINAL: 98575BS-0	A1QB09-0257	1 M257
	TERMINAL: 98752BS-0	A1QB11-0257	2 M257
	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09	M304
1	BRACKET: YS-002	A1QC07-0767	1 M767
	TERMINAL: 98661BS-1	A1QB01-0257	2 M257
	TERMINAL: ø4.75mm, 98475BS-1	A1QB06-0257	1 M257

REV.5 2018.04.18	MODIFY P1 MOLDED SIZE	REV.4 2017.09.14	MODIFY LENGTH
REV.3 2017.07.21	MODIFY CABLE & MSL-108 TERMINAL	REV.2 2017.07.12	MODIFY MOLDED SIZE & MODIFY PLUG LOGO
REV.1 2015.01.13	MODIFY MOLDED LOGO		

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

APPROVED					Cable Length Unless Other Tolerances: 0-700mm ±10mm, 201-1000mm ±20mm, 1001-1500mm ±25mm, 1501-2100mm ±30mm, 2100mm ±40mm
CHECKED	HU	18/MAR/18	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS ZHU	18/04/2018
DRAWING	PRODUCT NO.			PWCD-515P515R-13A-XXF-BLK	UNIT: mm