


P1,P2:	M-Y125B
	M-125E
P3:	M-487A
P4:	M-323C

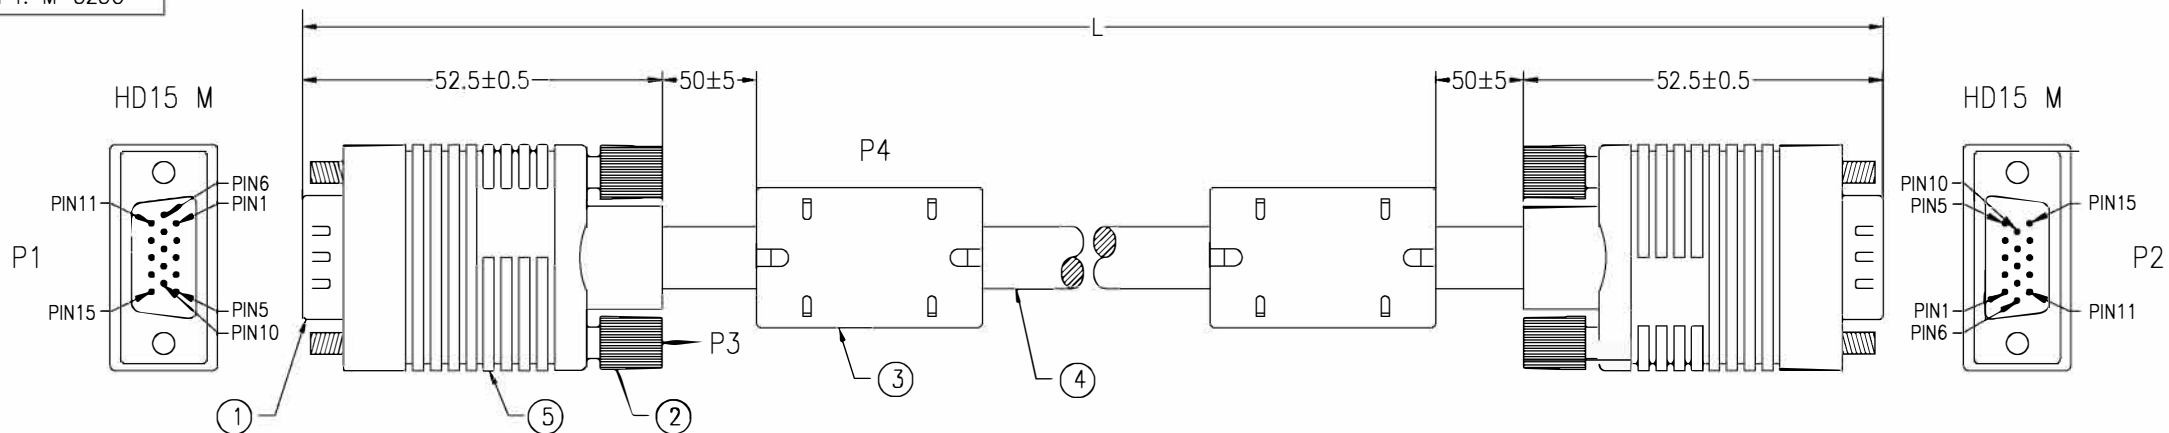

*NOTE: All relevant materials are complied with RoHS directive .

PIN ASSIGNMENT

P1	P2	
1	1	RED CONDUCTOR
6	6	RED SHIELD
2	2	GREEN CONDUCTOR
7	7	GREEN SHIELD
3	3	BLUE CONDUCTOR
8	8	BLUE SHIELD
4	4	BROWN
14	14	BROWN/WHITE
5	5	RED
12	12	RED/WHITE
9	9	YELLOW
10	10	ORANGE
13	13	ORANGE/WHITE
11	11	BLACK
15	15	BLACK/WHITE
SHIELD	SHIELD	

No.	DESCRIPTION	Q'TY	Supplier
5	BLACK PVC TUBE $\phi 3.0 \times 22$ mm	2	M304
	BLACK HEAT SHRINK TUBE $\phi 3.0 \times 10$ mm	6	M743
	BLACK HEAT SHRINK TUBE $\phi 1.5 \times 10$ mm	6	M743
	COPPER FOIL 33*65mm	2	M379
	MOLDED PE COLOR TRANSPARENT		TWN
	MOLDED PVC BLACK		M304
4	UL2919 {[28AWG+AL+S(29/0.10mmTS)]*3COAXIAL+(28AWG*4.5P)},AL+D+AMA BRAID(47%), OD:9.0mm, JACKET BLACK GROOVE, DRAWING No.EAAB2803T2804P2801C-197	L-20mm	M304
3	FERRITE CORE 17.5*10.5*28.5mm	2	M113
	MOLDED PVC BLACK		M304
2	MOLDED THUMBSCREW #4-40, LENGTH 48mm, BLACK	4	M95
1	HD15 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	2	M108

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ± 10 mm 201~1000mm ± 20 mm 1001 ~1500mm ± 25 mm 1501~2100mm ± 30 mm 2100mm \uparrow ± 40 mm
CHECKED	TIAN		
DRAWING	XIANG		
DATE	28/DEC/07		
ITEM NO.		UNIT:mm	 