


P1,P2:	M-Y125A
	M-125A
P3,P4;	M-954A
P5:	M-487A

Customer No:	No:1
--------------	------

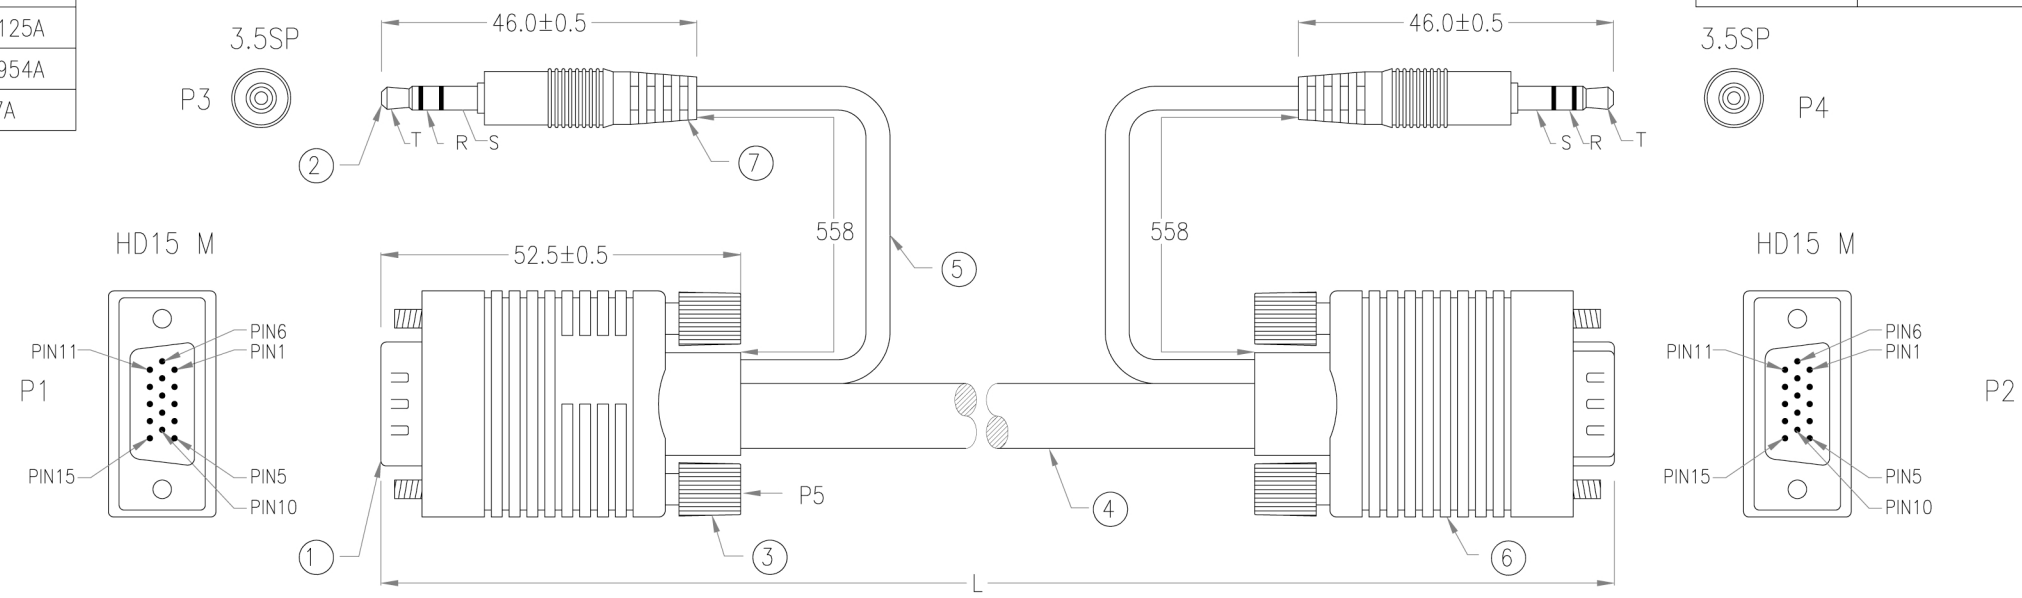

P3	P1	9665-2	P2	P4
	1	1	1	RED CONDUCTOR
	6	6	6	RED SHIELD
	2	2	2	GREEN CONDUCTOR
	7	7	7	GREEN SHIELD
	3	3	3	BLUE CONDUCTOR
	8	8	8	BLUE SHIELD
	4	4	4	RED
	14	14	14	RED/WHITE
	5	5	5	ORANGE
	12	12	12	ORANGE/WHITE
	9	9	9	PURPLE
	10	10	10	GREEN
	13	13	13	GREEN/WHITE
	11	11	11	BLUE
	15	15	15	BLUE/WHITE
	SHIELD		SHIELD	
T			T	BROWN
R			R	RED
S			S	BLACK

NOTE: ALL relevant materials are complied with RoHS directive

No.	DESCRIPTION	Q'TY	Supplier
7	MOLDED PVC BLACK		M304
6	BLACK PVC TUBE $\phi 3.0 \times 22\text{mm}$	2	M304
	BLACK HEAT SHRINK TUBE $\phi 3.0 \times 10\text{mm}$	6	M743
	BLACK HEAT SHRINK TUBE $\phi 1.0 \times 10\text{mm}$	12	M743
	ALUMINUM FOIL $33 \times 65\text{mm}$ ^④	2	M579
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BLACK		M304
5	UL2464 3C 28AWG, ALUM-MYLAR FOIL SHIELD WITH DRAIN WIRE, OD 3.5mm, JACKET BLACK, DRAWING No. EMAL2803C-563	635mm*2	M304
4	UL2919 {[28AWG+AL+S(29/0.10mmTS)]*3COAXIAL+(28AWG*4.5P)+28AWG*3C},AL+D 28#+AMA, BRAID(47%), OD:9.2mm, JACKET BLACK, DRAWING No.EAAB2803T2804P2801C2803C-557	L-20mm	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 48mm, BLACK	4	M95
2	DC 3.5 STERED PLUG	2	M518
1	HD15 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	2	M108
No.	DESCRIPTION	Q'TY	Supplier

APPROVED		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm	
CHECKED	HU		
DRAWING	JIANG		
DATE	23/DEC/11	ITEM NO.	
		UNIT:mm	

③	2011.09.05	MODIFY CABLE	③	2011.12.23	MODIFY CABLE
②	2011.08.30	MODIFY CABLE	④	2011.12.13	CHANGE COPPER FOIL TO ALUMINUM FOIL
①	2008.01.02	MODIFY CABLE			CHECKED