



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

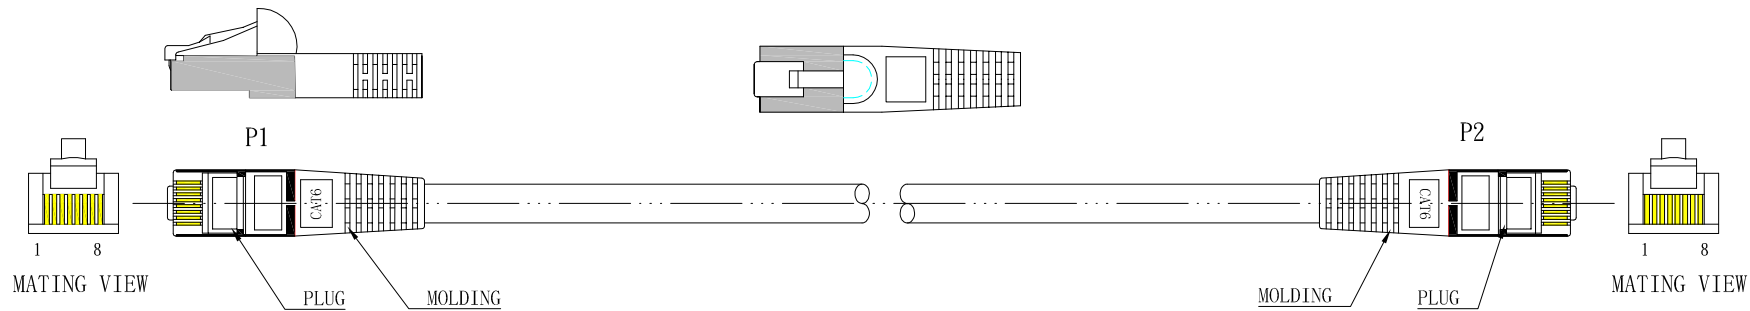

marking: **CAT.6 26AWGX4PR SSTP IEC 60332.1 PATCH CABLE - CONFORM TO ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2 3P/ETL VERIFIED ▲ CMX(UL) C(UL) CMH E164469-F3**
(FP0787)

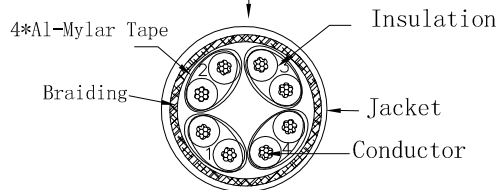

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8
	G	Shielded	G

Conductor	Bare Copper 26AWG
Insulation	Thickness:MIN at any point:0.20mm MAX AVG:0.35mm Diameter:1.05±0.06mm
Jacket	PVC Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:5.8±0.2mm

Wire	CAT. 6 SSTP STR 26AWG*4P
Plug	YUS-04 8P8C 50U"
xx=Length	XX
yy=Color	YY



UNC		
DRAWN BY:Dengfen	DATE: 2012/08/31	DESCRIPTION: CAT. 6 SSTP STR 26AWG*4P
CHECKED BY:	SHEET 1 of 1	ITEM NO. PC6-XXF-XXX-SH-S
APPROVED BY	SCALE	REV. 00 UNIT: mm