



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO UNIRISE STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

| REV | ECR | DESCRIPTION | BY | DATE | CHECKED |
|-----|-----|-----------------|------|------------|---------|
| A | - | INITIAL RELEASE | M. K | 12/09/2019 | A.J |

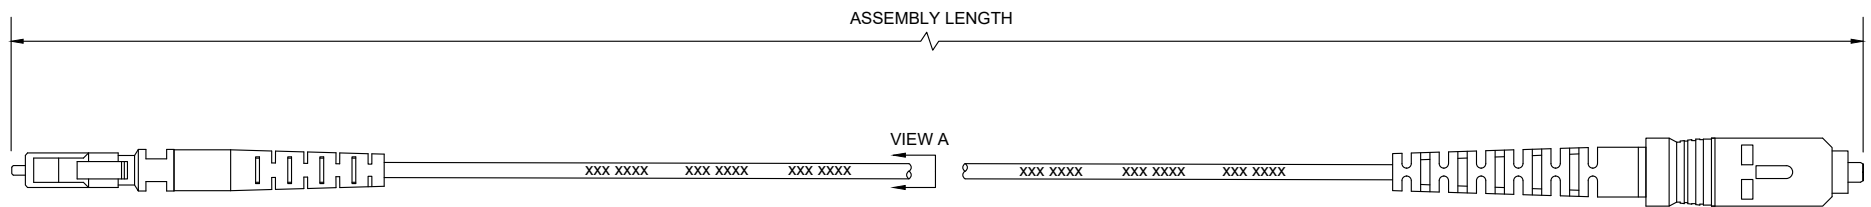

VIEW A
CROSS-SECTION
NOT TO SCALE

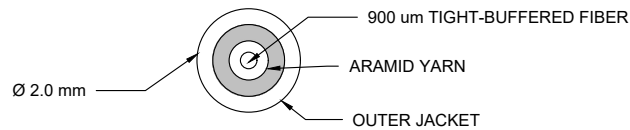

DESCRIPTION: LC UPC POLISH / SC UPC POLISH SINGLE-MODE 2.0 mm SIMPLEX OFNR CABLE,

| | | |
|-----------|------------|------------|
| DRAWN BY: | M. KHANFIR | 12/09/2019 |
| APVD BY: | A. JENSEN | 12/09/2019 |



DIMENSIONS: METRIC [IMPERIAL]

TITLE: LC/SC SINGLE-MODE 2.0 mm SIMPLEX

PROPRIETARY AND CONFIDENTIAL
INFORMATION OF UNIRISE. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

| | | |
|------|----------------|-----|
| SIZE | DWG. NO. | REV |
| A | FJ9LCSC-XXM-SX | A |

SCALE: NOT TO SCALE

SHEET 1 OF 1

BILL OF MATERIALS

| ITEM | QTY | COMPONENT |
|------|-----|---|
| 4 | 1 | SINGLE-MODE UPC TEST REPORT |
| 3 | AR | SINGLE-MODE OS2 OFNR 2 mm SIMPLEX BI-SMF 28 ULTRA CABLE, YELLOW |
| 2 | 1 | LC-UNCLIPPED UPC POLISH; BLUE HOUSING, BLUE BOOT: |
| 1 | 1 | SC-UNCLIPPED UPC POLISH; BLUE HOUSING, BLUE BOOT: |

UPC TEST LIMITS AT 1310 nm

| MAX. I.L. | TYP. I.L. | MIN. R.L. | TYP. R.L. |
|-----------|-----------|-----------|-----------|
| ≤0.50dB | 0.20dB | ≥50dB | 60dB |