
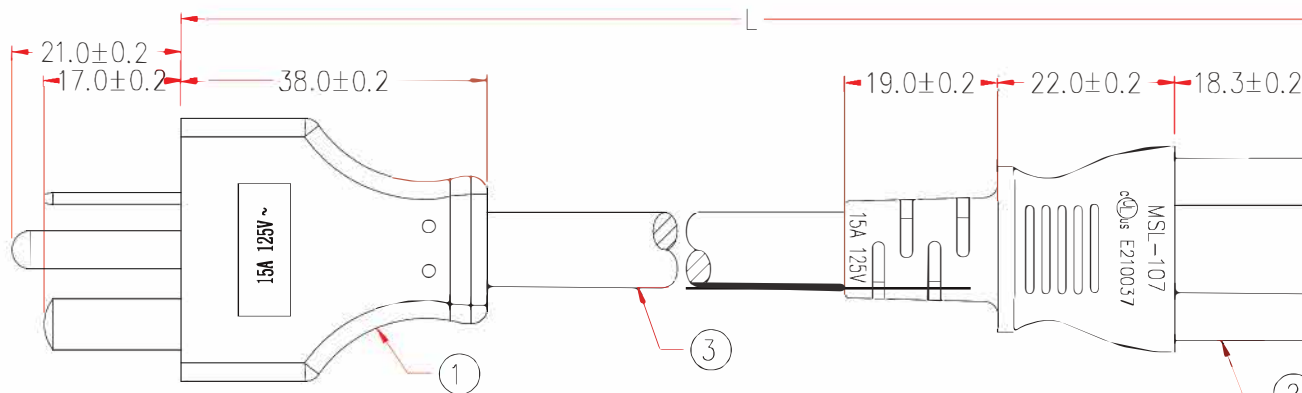


P1: M-073A

P2: M-005B


Customer No.:

P1

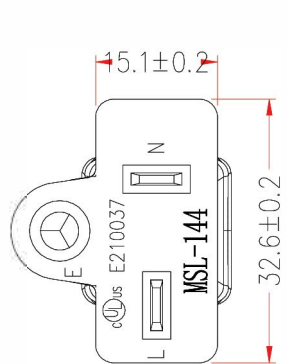

NEMA 5-20P (MSL-144)

IEC 320 C13(MSL-107)

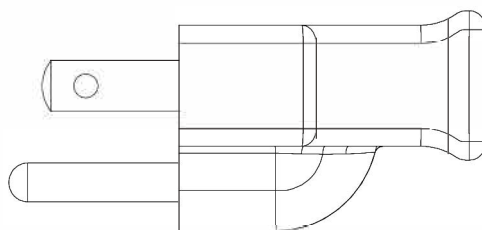MARKING: (UL) SJT 3/C 14AWG(2.08MM²) VW-1 105° 300V E204978CSA SJT 3/C 2.08MM²(14AWG) FT2 105° 300V 204790

P1,P2: cULus E210037

NOTE: All relevant materials are complied with RoHS directive .
THE CABLE MARKING IS CONCAVE LETTERING MOULD



P/N.	LENGTH(Lmm)
10W1-520C13-03	915mm
10W1-520C13-06	1830mm
10W1-520C13-08	2438mm
10W1-520C13-12	3658mm

107144B2F14A(FP306-00)

P1

P2

BLACK L ——— L
 WHITE N ——— N
 GREEN E ——— E

3	UL SJT 14AWG x 3C, OD 9.3mm, JACKET BLACK, DRAWING No.EPSVT011403C-147			H5TC21-0304K09	L-20mm	M304	
2	MOLED PVC 35P, COLOR BLACK			H1BC02-0304K09		M304	
	BRACKET: CP-R445A-BS			A1QC61-0767	1	M767	
	TERMINAL: 2*4mm, 98744BS-0/A			A1QB24-0257	3	M257	
1	MOLED PVC 35P, COLOR BLACK			H1BC02-0304K09		M304	
	BRACKET: HP-01700-08AW0			A1QC77-0406	1	M406	
	TERMINAL: 98695L			A1QB37-0257	2	M257	
	TERMINAL: Ø4.75, 98473			A1QB46-0257	1	M257	
No.	DESCRIPTION					Q'TY	Supplier
APPROVED						Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm ↑ ±40mm	
CHECKED	HU	09/JAN/20	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS			
DRAWING	XJW	09/JAN/20	PRODUCT NO.	PWCD-520PC13-15A-XXF-BLK			 UNIT: mm

Cable Length
 Unless Other Spec.
 Tolerances:
 0 ~200mm ±10mm
 201~1000mm ±20mm
 1001 ~1500mm ±25mm
 1501~2100mm ±30mm
 2100mm ↑ ±40mm

UNIT: mm

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm